


Dieseko's

PILING & VIBRO EQUIPMENT

► PVE 38 M ◀

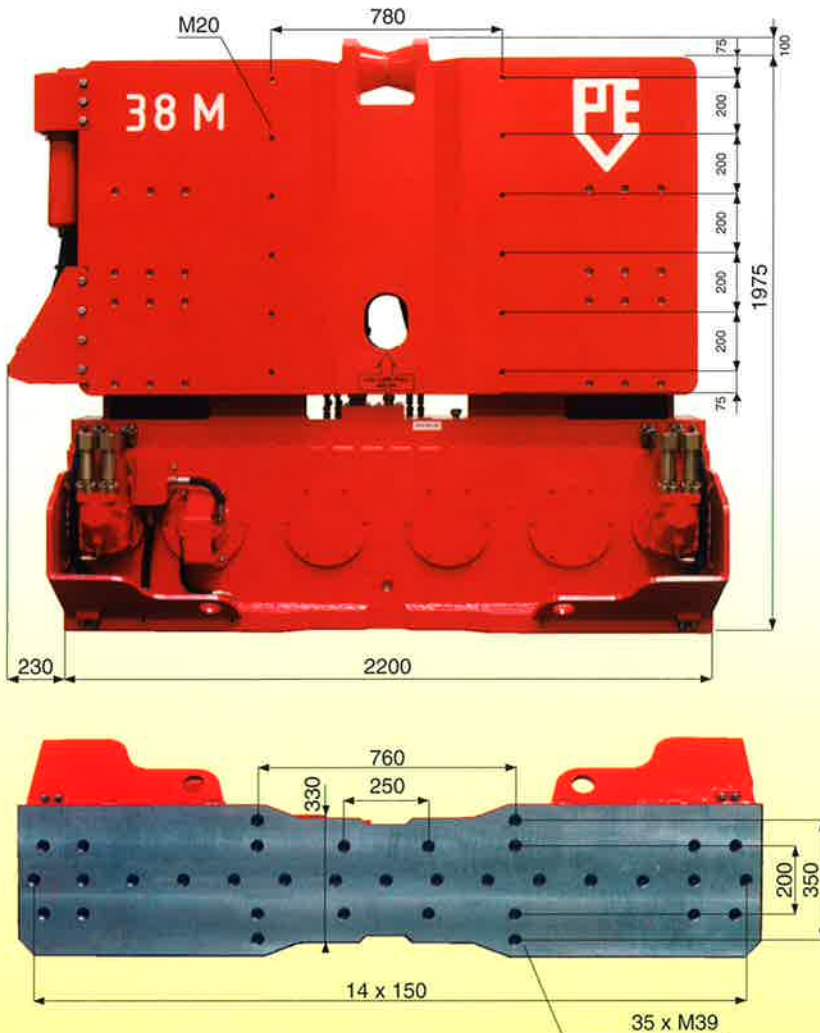

► SPECIFICATIONS PVE 38 M ◀

| | | |
|------------------------------------|-----------|-----------|
| Eccentric moment | 38 | kgm |
| Max. frequency | 28,3/1700 | Hz/r.p.m. |
| Max. centrifugal force | 1200/120 | kN/ton |
| Max. line pull capacity | 400/40 | kN/ton |
| Vibrating weight (including clamp) | 4150 | kg |
| Total weight (without clamp) | 5400 | kg |
| Amplitude | 18 | mm |
| Max. oilflow | 500 | l/min |

Due to improvement and engineering progress we reserve the right to change specifications without notice.

